


## 6-Channel Speaker Adapter - MONO

A 20-inch long audio adaptor:

1 1/4" TS phone locking jack (Neutrik NJ3FC6) -> XLR 6-pin male right-angle plug (Neutrik NC6MRX)

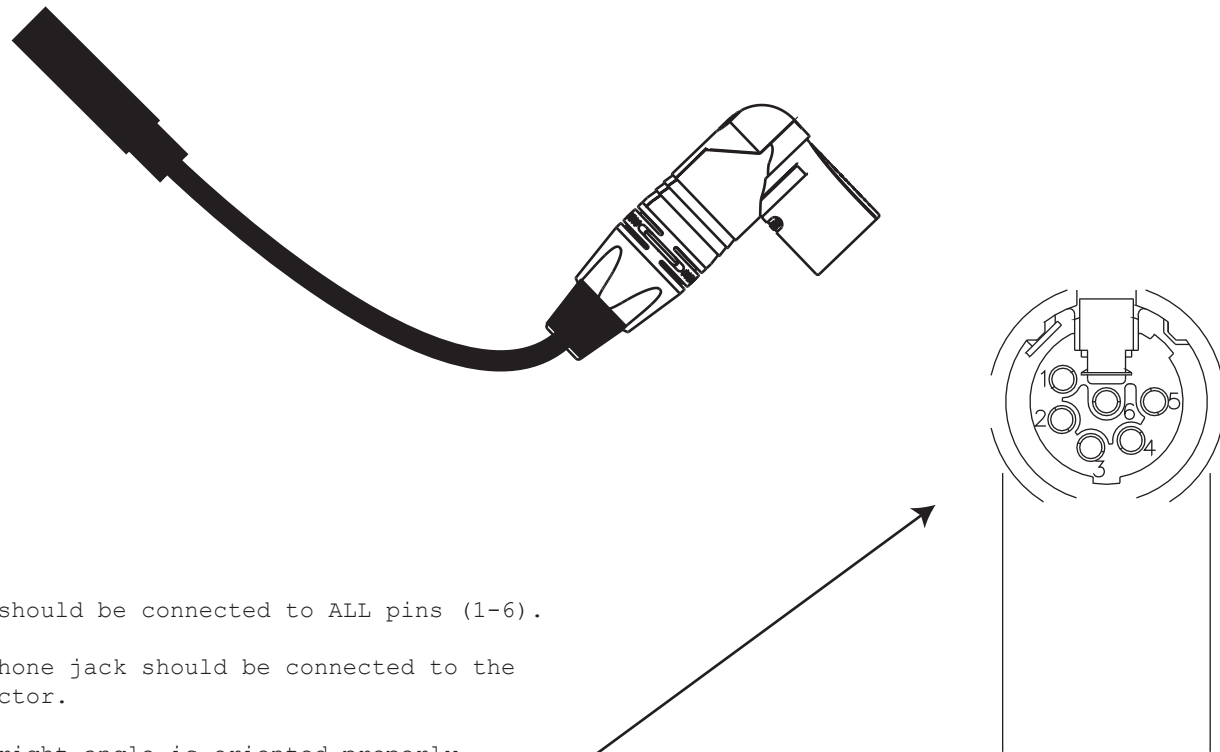

### Notes:

- 1.) The tip of the phone jack should be connected to ALL pins (1-6).
- 2.) The shield/ground of the phone jack should be connected to the ground flange on the XLR connector.
- 3.) Please make sure that the right angle is oriented properly (pins should be along the bottom as jack faces down and towards you)